

4200 INTERNATIONAL CHASSIS GULF STREAM COACH

These photos, along with the installation instructions, are to assist a qualified shop in the placement of your SUPERIDE SUSPENSION.




After properly blocking and lifting with safety supports in place, remove cross member and spring hangers. Mark center of spring hanger, as pictured, for placement of frame plates — left and right.



Superide installed on 4200 International chassis. Note the leveling jacks and adequate suspension clearance.



Place frame plates as pictured and drill necessary holes.

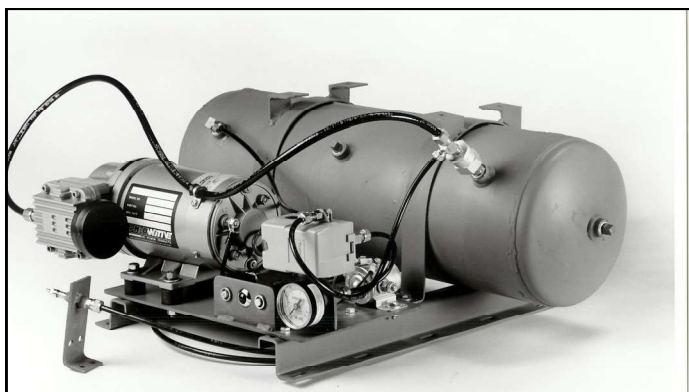

Air kit available with compressor, tank, regulator, pressure control and necessary valves to protect air supply. Gauge and recovery light mounted as pictured. Light can be remounted in cab so that driver knows when compressor is running and monitor recovery time. Compressor and control switches each protected with separate resettable fuses (push in to re-set).

